

SPECIFICATIONS

EXITS

HOUSING

- Die-cast aluminum housing
- Available in white, black, or aluminum finishes
- Field selectable knockout chevron directional indicators

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs

BATTERY

- 2.4V Maintenance-free, rechargeable NiCad battery (EM models)
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

MOUNTING

- Aluminum mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified

WARRANTY

- 5 Year




CAS
Thin Die-Cast
Aluminum Exit

ORDERING INFORMATION

MODEL#	# Faces	Letter	Face/Housing
CAS	1	R (Red)	A (Aluminum)
	2	G (Green)	W (White)
			B (Black)

Options (Factory Installed)

EM - NiCad Battery

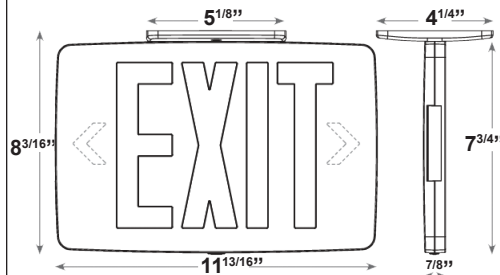

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
CAS	1.0	1.0	0.10	0.10