

**SPECIFICATIONS**

**HARSH ENVIRONMENT**

**HOUSING**

- Heavy duty diecast aluminum housing
- Available in white or black finishes
- Field selectable knockout chevron directional indicators

**ELECTRICAL**

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 10°C - 50°C (32°F - 122°F)

**ILLUMINATION**

- Ultra bright, energy efficient red or green LEDs
- Impact resistant polycarbonate lens around lamps
- Available with 2W, 5W, or 7W LED Lamps

**BATTERY**

- Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board and lamps for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

**MOUNTING**

- Polycarbonate mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount
- Knockouts provided for conduit feed applications

**CODE COMPLIANCE**

- cSAus Listed for Wet Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- BAA Rated
- IP66 Rated
- Sanitation Approved

**WARRANTY**

- 5 Year



**CAHA-C**  
**Cast Aluminum**  
**High Abuse Combo**

**ORDERING INFORMATION**


MODEL	Face#	Letter	Housing	Voltage/Wattage	Lamps
CAHAU-C	1	R (Red)	W (White)	6V42W	LMR02 (2WLED) -12V
		G (Green)	B (Black)	12V42W	LMR05 (5WLED) - 6V/12V LMR07 (7WLED) - 6V/12V

**Options (Factory Installed)**

- SD - Self Diagnostics (with 10 minute time delay)

**Accessories (Order Separately, Ships on Side)**

- SK12-W - 12" Pendant Kit - White
- SK12-B - 12" Pendant Kit - Black
- PSK12-BA - 12" Pendant Kit - Brushed Aluminum

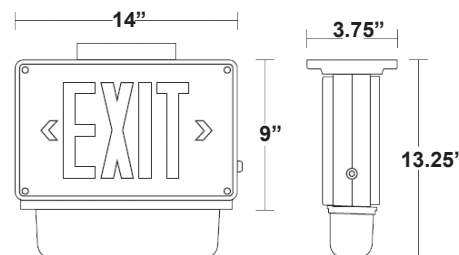

## LUMEN INFORMATION

LAMP	VOLTAGE	LUMEN/LAMP
2W MR16 LED	12V	184 Lms
5W MR16 LED	6V	472 Lms
	12V	589 Lms
7W MR16 LED	6V	647 Lms
	12V	647 Lms

## SPACING GUIDELINES

Lamp	3' Wide Egress Path	
	Mounting Ht.	Unit to Unit (ft)
5W LED	7.5'	60'