

SPECIFICATIONS

STATE SPECIFIC

HOUSING

- Extruded aluminum housing
- Available in white or aluminum finishes
- Universal face option provided with both single/double faces

ELECTRICAL

- Dual 120/277V standard
- Operating Temperature: 0°C - 50°C (32°F - 122°F)

BATTERY

- 4.8V Maintenance-free, NiCad battery (EM models)
- LVD prevents battery from deep discharge
- Internal transfer switch automatically connects battery for 120-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing

ILLUMINATION

- Silk screened acrylic panels provide uniform illumination

MOUNTING

- Mounting canopy included for top, end, or back mount

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA, Local and State Codes
- Meets City of Chicago requirements
- CEC T20 Certified

WARRANTY

- 5 Year




CLED-EDG
Chicago Approved
Edgelit

ORDERING INFORMATION

MODEL#	# Face	Letter/Panel	Housing	Options	Signage/Arrows
CLED-EDG	2 (Universal)	RW (Red/White)	W (White)	EM (Battery)	NA ^{1/2} (Exit No Arrow)
	3 (Single)		A (Aluminum)		DA ^{1/2} (Exit Double Arrow)
					RA ¹ (Exit Right Arrow)
					LA ¹ (Exit Left Arrow)
					LARA ² (Exit Left/Right Arrow)
					SNA ^{1/2} (Stair No Arrow)
					SDA ^{1/2} (Stair Double Arrow)
					SRA ¹ (Stair Right Arrow)
					SLA ¹ (Stair Left Arrow)
					SLARA ² (Stair Left/Right Arrow)

¹ Single face only

² Double face only

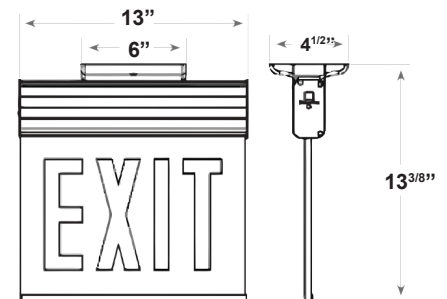

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
CLED-EDG	4.3	4.7	0.04	0.02

ARROW CONFIGURATION

