

**SPECIFICATIONS**

**STATE SPECIFIC**

**HOUSING**

- Extruded aluminum housing
- Available in white or aluminum finishes

**ELECTRICAL**

- Dual 120/277V standard
- Operating Temperature: 0°C - 50°C (32°F - 122°F)

**BATTERY**

- 4.8V Maintenance-free, NiCad battery (EM models)
- LVD prevents battery from deep discharge
- Internal transfer switch automatically connects battery for 120-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing

**ILLUMINATION**

- Silk screened acrylic panels provide uniform illumination

**MOUNTING**

- Compatible with drywall or drop-thry ceiling installations
- Recessed wall mount also available

**CODE COMPLIANCE**

- UL Listed for Damp Locations
- Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA, Local and State Codes
- Meets City of Chicago requirements
- CEC T20 Certified

**WARRANTY**

- 5 Year




**CLED-EDGR**  
Chicago Approved  
Recessed Edgelit

**ORDERING INFORMATION**

MODEL#	# Face	Letter/Panel	Housing	Options	Signage/Arrows
CLED-EDGR	2 (Double)	RW (Red/White)	W (White)	EM (Battery)	NA <sup>1/2</sup> (Exit No Arrow)
	3 (Single)		A (Aluminum)	RW (Recessed Wall)	DA <sup>1/2</sup> (Exit Double Arrow)
					RA <sup>1</sup> (Exit Right Arrow)
					LA <sup>1</sup> (Exit Left Arrow)
					LARA <sup>2</sup> (Exit Left/Right Arrow)
					SNA <sup>1/2</sup> (Stair No Arrow)
					SDA <sup>1/2</sup> (Stair Double Arrow)
					SRA <sup>1</sup> (Stair Right Arrow)
					SLA <sup>1</sup> (Stair Left Arrow)
					SLARA <sup>2</sup> (Stair Left/Right Arrow)

<sup>1</sup> Single face only

<sup>2</sup> Double face only

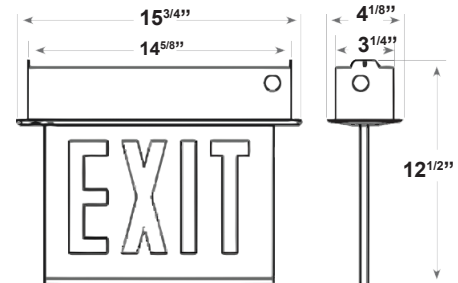

## ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
CLED-EDGR (AC)	4.3	4.7	0.040	0.02
CLED-EDGR (EM)	1.5	4.9	0.042	0.02

## ARROW CONFIGURATION

