

SPECIFICATIONS

EXITS

HOUSING

- Extruded aluminum housing
- Available in aluminum, white, or black finishes
- Unit can be surface or recessed mounted, field selectable
- Exits come with single and double face configurations, field selectable
- Chevron indicators are field selectable

ELECTRICAL

- Dual 120/277V standard
- Charge rate/power "On" LED light and push-to-test switch for testing
- Operating Temperature: 10°C - 40°C (50°F - 104°F)
- 3W or less energy consumption on AC models, 5W or less on EM models

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs
- Clear or silver mylar acrylic panels

BATTERY

- Maintenance-free, rechargeable NiCad battery (EM models)
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

MOUNTING


- Unit can be surface/recessed wall, ceiling, slope ceiling, and end mounted

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified

WARRANTY

- 5 Year

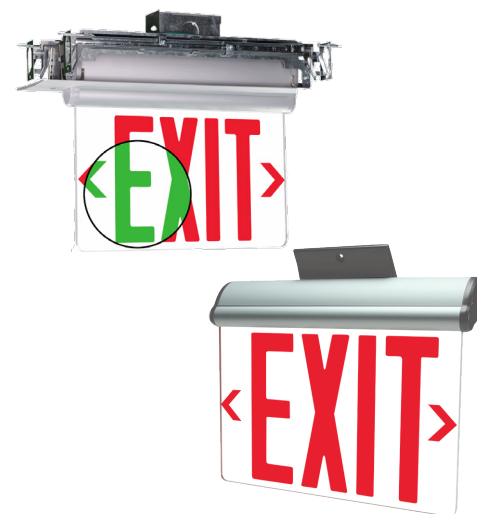

EDG-UN2 Universal Edgelit Exit

ORDERING INFORMATION

MODEL#	# Faces / Panel
EDG-UN2-RG1-*	Red/Green Selectable, Single Clear and Double Mirror Panel
EDG-UN2-RG2-*	Red/Green Selectable, Single Mirror and Double Mirror Panel
*Specify Housing: W-White ; A-Aluminum ; B-Black	

Options (Factory Installed)

EM	- NiCad Battery
SD	- Self Diagnostics (requires EM)

Accessories (Order Separately, Ships on Side)

EDG-UN-SK12-*	- 12" Pendant Kit
EDG-UN-SK24-*	- 24" Pendant Kit
EDG-E-PA	- Pendant Adapter
*Specify W-White , B-Black , BA-Aluminum	

