



Project

Type

Catalog Number

SPECIFICATIONS

EMERGENCY

HOUSING

- Injection molded, high-impact resistant thermoplastic
- Available in white or black finishes

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Operating Temperature: 20°C - 40°C (68°F - 104°F)

ILLUMINATION

- 7W high output LED lamps standard (587 Lumens/head)
- Smooth metallized reflector and glass lens
- Adjustable heads

BATTERY

- 6V maintenance-free, rechargeable sealed lead acid battery
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

MOUNTING

- Surface mount via back plate (fits most standard jboxes and snaps into place)
- Knockout for conduit applications

CODE COMPLIANCE


- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- Assembled in America (under the Buy American Act) available

WARRANTY

- 5 Year



EM16-LP-LED-HO
Thermoplastic
Emergency Unit

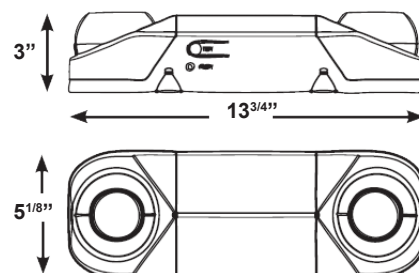

ORDERING INFORMATION

CATALOG#

EM16-LP-LED-HO

OPTIONS (Factory Installed)

- BLK - Black Housing (white standard)
- USA - Assembled in USA



ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EM16-LP	4.2	5.2	0.039	0.021

SPACING GUIDELINES

Model #	Mounting Height (ft)	3' Wide Egress Path		6' Wide Egress Path		Lumens per Head	Head Qty
		Single Unit (ft)	Unit to Unit (ft)	Single Unit (ft)	Unit to Unit (ft)		
EM16-LP-LED-HO	7.5' Wall Mount	76'	76'	59'	60'	587	2
	10' Wall Mount	72'	75'	56'	58'		
	15' Wall Mount	58'	60'	44'	50'		
	20' Wall Mount	35'	42'	40'	45'		