

SPECIFICATIONS

EMERGENCY

HOUSING

- Injection molded, high-impact resistant thermoplastic
- Available in white or black finishes

ELECTRICAL

- Dual 120/277V
- Optional 120/230V available
- Operating Temperature: 0°C - 30°C (32°F - 86°F)

ILLUMINATION

- 0.5W LED Lamp heads (42 Lumens/head)
- 2W High Output lamps available (110 Lumens/head)
- Smooth reflector and plastic lens

BATTERY

- 3.6V maintenance-free, rechargeable NiCad battery
- Bi-color LED indicator light alerts battery's condition (Red-check battery; Green-normal)
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- RC unit will run an additional 1W

MOUNTING

- Surface mount via back plate (fits most standard jboxes and snaps into place)
- Suitable for wall or ceiling mount

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes

WARRANTY

- 5 Year




**EM3-LED
LED Emergency Unit**

ORDERING INFORMATION

CATALOG#
EM3-LED

OPTIONS (Factory Installed)	
HO	- High Output Lamps
RC	- Remote Capable (not compatible with HO option)
SV	- 120/230V
BLK	- Black Housing

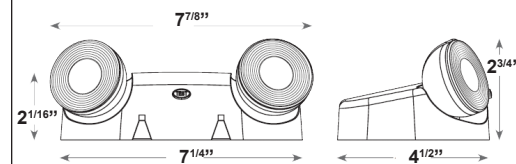

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)			Input Amps (A)		
	120V	230V	277V	120V	230V	277V
EM3-LED	0.33	0.33	0.37	0.046	0.044	0.052
EM3-LED-RC	0.52	0.52	0.60	0.068	0.068	0.070
EM3-LED-HL	0.52	0.52	0.60	0.068	0.068	0.070

SPACING GUIDELINES

Model #	Mounting Height (ft)	3' Wide Egress Path		Lumens per Head	Head Qty
		Single Unit (ft)	Unit to Unit (ft)		
EM3-LED	7.5' Wall Mount	10'	14'	42	2
	10' Wall Mount	8'	12'		
EM3-LED-HO	7.5' Wall Mount	35'	38'	110	2
	10' Wall Mount	8'	38'		