

SPECIFICATIONS

EMERGENCY

HOUSING

- 20-Gauge steel trim plate
- Offered in white or black finishes

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Operating Temperature: 25°C (77°F)

ILLUMINATION

- 1W LED Lamp heads (45 Lumens/lamp)
- Chrome-plated metallized reflector and plastic lens
- Adjustable heads

BATTERY

- 6V maintenance-free, sealed lead acid battery
- Low Voltage Disconnect prevents batter from deep discharge
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

MOUNTING

- Bar hangers on back box for recessed mount
- Compatible with drop ceiling mount installations

CODE COMPLIANCE

- UL Listed for Indoor Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes

WARRANTY

- 5 Year



**EM3R-LED
Recessed Steel
LED Emergency Unit**


ORDERING INFORMATION

CATALOG#

EM3R-LED

OPTIONS

BLK - Black Housing

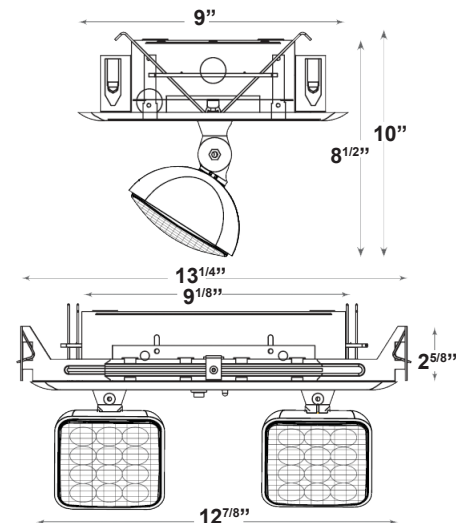

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EM3R-LED	5.0	5.0	0.05	0.03