

SPECIFICATIONS

EMERGENCY

HOUSING

- Injection molded, high-impact resistant thermoplastic
- Offered in white or black finishes

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Operating Temperature: 25°C (77°F)

ILLUMINATION

- 5.4W PAR36 Lamp heads
- Chrome-plated metallized reflector and plastic lens
- Adjustable heads

BATTERY

- 6V maintenance-free, sealed lead acid battery
- Low Voltage Disconnect prevents batter from deep discharge
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

MOUNTING

- Bar hangers on back box for recessed mount
- Compatible with drop ceiling mount installations

CODE COMPLIANCE


- UL Listed for Indoor Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- Assembled in America (under the Buy American Act)

WARRANTY

- 5 Year



EM3R
Recessed Steel
Emergency Unit

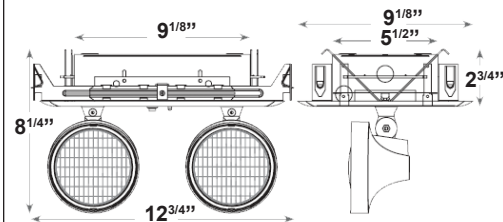

CATALOG#

EM3R-6V12

OPTIONS

- BLK - Black Housing
- SD - Self Diagnostics
- USA - ARRA Compliant

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EM3R	5.0	5.0	0.05	0.03