

SPECIFICATIONS

HARSH ENVIRONMENT

HOUSING

- Reinforced fiberglass construction
- Polycarbonate lens
- Gray housing, white panel
- Field selectable knockout chevron directional indicators

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 10°C - 50°C (4°F - 104°F)
- Heater Temperature: -20°C (-4°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs

BATTERY

- Maintenance-free, rechargeable NiCad battery (EM models)
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 48 hours
- 120 Minute battery also available

MOUNTING

- Unit can be wall, ceiling, or end mounted (must specify upon ordering)

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- NEMA4X Rated
- IP66 Rated
- NSF Rated

WARRANTY

- 5 Year

ORDERING INFORMATION

MODEL#	# Faces	Letter	Panel	Mounting
EX4X	1	R Red	W White	W Wall
	2	G Green		C Ceiling
				E End

OPTIONS (Factory Installed)

EM	- NiCad Battery
EM2	- 120 Minute NiCad Battery
SD	- Self Diagnostics (requires EM)
HTR	- Internal Heater (specify voltage)
IV	- Visual Intermittent Alarm (requires EM-SD options)
2AC	- Dual Circuit (AC only)
SWXE	- Special Wordng Panel (prefix to part number)


Accessories (Order Separately, Ships on Side)

WG15	- Wire Guard
SK12-W	- 12" Pendant Kit - White
SK12-B	- 12" Pendant Kit - Black
SK12-BA	- 12" Pendant Kit - Brushed Aluminum



**EX4X
NEMA4X Exit**

Single Face

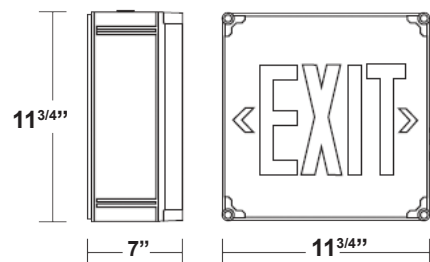

Double Face

