

SPECIFICATIONS

EMERGENCY

HOUSING

- 6" Recessed housing with mounting bar hangers
- Steel mounting frame and housing
- Thermoplastic adjustable gimbal ring
- Junction box with 3/4" knockouts for AC input
- White or black trim securely attached to housing with spring clips

ELECTRICAL

- Dual 120/277
- Charge rate/power "On" LED light and push-to-test switch for testing
- Operating Temperature: Listed to 25°C (77°F)

ILLUMINATION

- 6.8W Bi-pin Halogen lamp (92 Lumens/lamp)
- 1.5W LED Lamps available (116 Lumens/lamp)

BATTERY

- 6V maintenance free sealed lead acid battery
- Unit will operate for a minimum of 90 minutes in the event of a power failure.
- 24 hours or less recharge time
- Low Voltage Disconnect standard to prevent deep battery discharge

CODE COMPLIANCE



- UL Listed for Indoor Locations
- Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

WARRANTY

- 5 Year



G-1
Self Contained Recessed
Emergency Gimbal

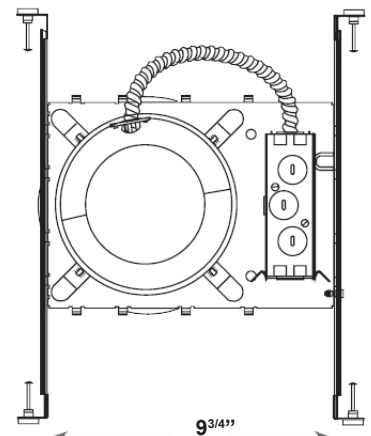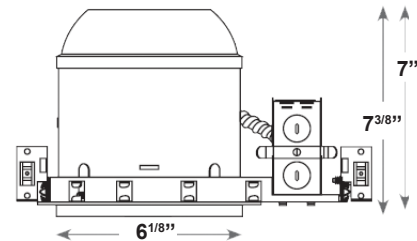

ORDERING INFORMATION

CATALOG#

G-1 6V, 8W Halogen Lamp - Sealed Lead Acid Battery

OPTIONS

- BLK** - Black Plaster Housing
- LED** - 1.5W LED Lamps

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
G-1	8.0	8.0	0.05	0.05