

SPECIFICATIONS

EMERGENCY

HOUSING

- Aluminum ring with white powder coat, brushed aluminum finish optional
- External test switch (ACEM & EM models)
- Fits through 4.25" diameter opening
- Indoor recessed mount
- Adjustable side-mounted retaining clips

ELECTRICAL

- 120-347VAC
- Solid state microprocessor includes line latch, brownout protection, battery and charge circuit monitoring, LED failure detection, and reverse polarity protection
- Charge rate/power "On" LED light and push-to-test switch for testing
- Operating Temperature: Listed to 25°C (77°F)

ILLUMINATION

- 2 interchangeable lenses for symmetric or asymmetric distribution
- 4 x 2.5W LEDs
- 4000K
- 1349-1414 Lumens
- Path of egress: 3' wide

BATTERY

- Ni-MH batteries standard (ACEM & EM Models)
- 90 minute emergency duration, 120 minute battery optional
- Operating Temperature: 10°C - 40°C (50°F - 104°F)
- Fuse protection standard

CODE COMPLIANCE

- UL Listed for Damp Locations
- BAA Compliant
- FCC Compliant
- ADA Compliant

WARRANTY

- 5 Year




G2-LED Recessed LED Emergency Unit

ORDERING INFORMATION

CATALOG#	Operation	Driver	Wattage	Rated Current
G2-LED	AC Only	120-347V	13.0-13.1	0.25-0.15
G2-LED-ACEM	AC & EM	120-347V	4.5-5.0	0.15-0.10
G2-LED-EM	EM Only	120-347V	17.3-17.0	0.35-0.25

OPTIONS


EM2	- 120 min. Emergency Backup
SD	- Self Diagnostics
BA	- Brushed Aluminum Housing

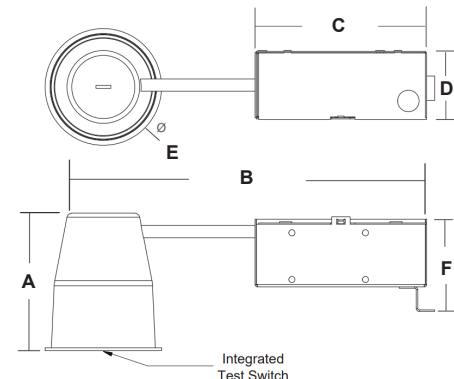

	A	B	C	D	E	F
G2-LED	4.75"	15.5"	6 17/20"	2 7/10"	4.75"	3 3/8"

SPACING GUIDELINES

1FC AVERAGE

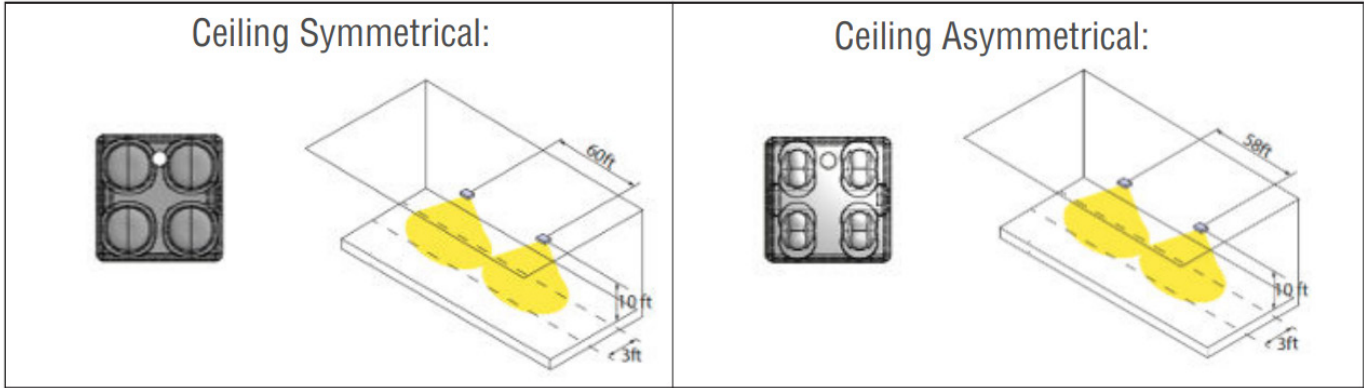

1FC MIN

