



Project

Type

Catalog Number

**SPECIFICATIONS**

**HARSH ENVIRONMENT**

**HOUSING**

- Stainless steel hardware
- A360 die-casting aluminum housing

**ELECTRICAL**

- AC100-277V
- Operating Temperature: -20°C - 60°C (-4 F° - 140 F°)

**ILLUMINATION**

- Tempered glass panel
- Offered 2.5 - 10W Lamps

**BATTERY**

- 3-hour emergency operation capability to maintain illumination during power outages
- 50,000 @ L<sub>70</sub>

**MOUNTING**


- Wall mount
- Mounting Arm available

**CODE COMPLIANCE**

- Class I, Div I, Groups C, D
- Class I, Div II, Groups A, B, C, D
- Class II, Div I, Groups E, F, G
- Class II, Div II, Groups F, G
- Class III
- IP66 Rated for Wet Locations
- UL1598A Marine Outside Type
- UL1598 Listed for Wet Locations
- UL844 Listed for Hazardous Locations
- BAA Compliance Available

**WARRANTY**

- 5 Year Warranty

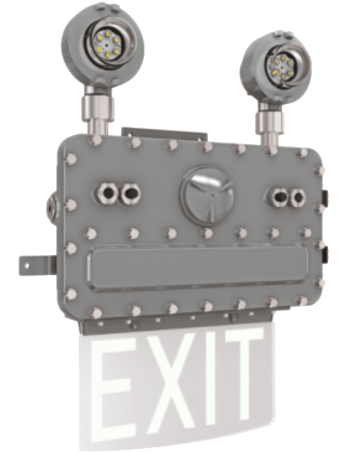

**HLXC-F  
Hazardous Combo**

**ORDERING INFORMATION**

MODEL#	#Face	Face Color	Housing	Lamps	Chevrons
HLXC-F	1	R (Red)	G (Gray)	2.5W (2.5W / 390 Lms ea.)	Blank (No Arrows)
	2	G (Green)		5W (5W / 650 Lms ea.)	LA (Left Arrow)
				8W (8W / 1040 Lms ea.)	RA (Right Arrow)
				10W (10W / 1300 Lms ea.)	DA (Double Arrow)
				RL (Right/Left Arrow)*	
<i>*double face only</i>					

**Options**

BAA - Buy American Compliant

**Accessories**

HLEX-F-ARM - Mounting Arm

