



Project

Type

Catalog Number

SPECIFICATIONS

HARSH ENVIRONMENT

HOUSING

- Reinforced polycarbonate construction
- Industrial gray finish
- Field selectable knockout chevron directional indicators

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: -20°C - 50°C (4°F - 122°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs

BATTERY

- 4.8V Maintenance-free, rechargeable NiCad battery (EM models)
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery)

MOUNTING

- Mounting bracket provided for surface wall mount
- Pre-installed conduit hub for conduit and pendant mount applications

CODE COMPLIANCE


- UL Listed for Wet Locations
- Meets UL924, UL844, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- IP66 Rated
- Hazardous Rated: Class I, Div II, Groups A, B, C, D

WARRANTY

- 5 Year



**HLXE
Hazardous Location
Polycarbonate Exit Sign**

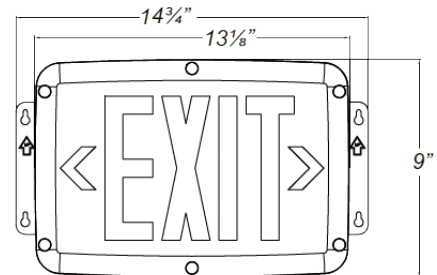

ORDERING INFORMATION

MODEL	Face #	Letter	Housing
HLXE	1	R (Red)	G (Gray)
	2	G (Green)	

OPTIONS

EM	- NiCad Battery
SD	- Self Diagnostics (requires EM)
TPS	- Tamper Proof Screws



ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
HLXE	3	3	0.03	0.02