

SPECIFICATIONS

EMERGENCY

HOUSING

- Low profile aluminum housing
- Available in white, black, or satin bronze finishes

ELECTRICAL

- Universal 120-277V
- Standard Operating Temperature: -20°C - 40°C (-4°F - 104°F)
- Cold Weather Temperature: -40°C

BATTERY

- 3.6V, 5Ah Li-SOCI2 battery
- LVD prevents battery from deep discharge
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

ILLUMINATION

- Sealed diffused lens
- 50,000 Hours
- 5300K standard; 2900 - 3800K available

MOUNTING

- Universal knockout pattern on back plate
- Suitable for wall or ceiling mount
- Note: EM Models require 1^{1/2}" JBox extension ring

CODE COMPLIANCE

- cETLus Listed for Outdoor Locations
- Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA, Local and State Codes
- IP66 Rated
- BAA Compliant

WARRANTY

- 5 Year



**ODEL
Outdoor LED AC/EM Unit**


ORDERING INFORMATION

CATALOG#	Description
ODEL-10W-*#	10W, 371 Lumens, AC Only
ODEL-10W*-EM-#	10W, 494 Lumens, Battery Backup
ODEL-20W-*#	20W, 742 Lumens, AC Only
ODEL-20W*-EM-SD-#	20W, 988 Lumens, Battery Backup, Self Diagnostics

*Specify Mounting; **C**-Ceiling Mount, **W**-Wall Mount
 #Specify Color; **WH**-White; **BA**-Brushed Aluminum; **BZ**-Bronze, **BK**-Black

OPTIONS (Factory Installed)	
SD	- Self Diagnostics (EM Models Only) - 20W-EM unit already has SD standard
CW	- Cold Weather Package (-40°C) - EM Models Only
SW120	- Security Lighting with Control Switch-120V (Standard EM Models)
SW277	- Security Lighting with Control Switch-277V (Standard EM Models)
SW-SD	- Security Lighting with Control Switch for EM-SD models (120/277V)
2AC120	- Dual AC Output - 120V
2AC277	- Dual AC Output - 277V
CW1	- Custom Window Filter - 3800K
CW2	- Custom Window Filter - 3200K
CW3	- Custom Window Filter - 2900K
CC	- Custom Color

SPACING GUIDELINES

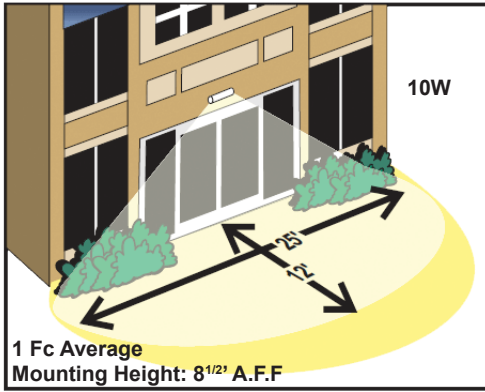

SELF DIAGNOSTICS

STATUS	LED DISPLAY
NORMAL FULL CHARGE	● GREEN ON
NORMAL FAST CHARGE	● ORANGE ON
FAILED BATTERY	●● RED FLASH FAST
FAILED LAMP	●● GREEN FLASH
FAILED TRANSFER	●● ORANGE FLASH
FAILED CHARGER	●● RED FLASH SLOW

MOUNTING

