

## SPECIFICATIONS

EXITS

**HOUSING**

- Injection-molded high-impact resistant thermoplastic
- Available in white, black, or aluminum housings
- Thermoplastic recessed-mount trim
- Chevrons are field installable

**ELECTRICAL**

- Dual 120/277V
- Optional 208/220/240V available
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

**ILLUMINATION**

- Ultra bright, energy efficient red or green LEDs
- UV Stabilized acrylic edgelit panel
- Universal Single/Double face utilizes silver background panel and stick on mylar sheet

**BATTERY**

- 3.6V Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- Fully automatic state, two-rate charger initiates battery charge to recharge in battery in 24 hours
- Bi-color LED indicator alerts to battery condition (Green-normal, Red-check battery)

**MOUNTING**

- Mounting canopy included for top, end, or back mount
- Recessed mount conversion kit available
- Bar hangers included with recessed version for drywall or drop ceiling mount installations

**CODE COMPLIANCE**

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified

**WARRANTY**

- 5 Year



## PLEDG2

### Thermoplastic Edgelit

**ORDERING INFORMATION**

MODEL#	Letter	Panel	Housing
PLEDG2	R (Red)	S (Silver)	A (Aluminum)
	G (Green)		W (White)
RG	(Red/Green)		B (Black)

**OPTIONS (Factory Installed)**

EM - Battery Backup


**ACCESSORIES (Order Separately)**

PLEDG2-RK - Recessed-mount Conversion Kit


Dimensions on 2nd page

## DIMENSIONS

### Recessed

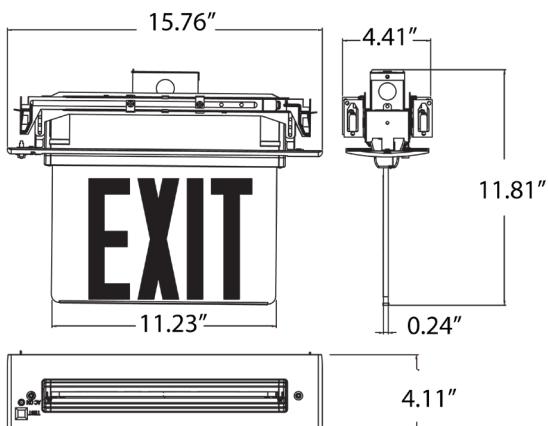

### Surface

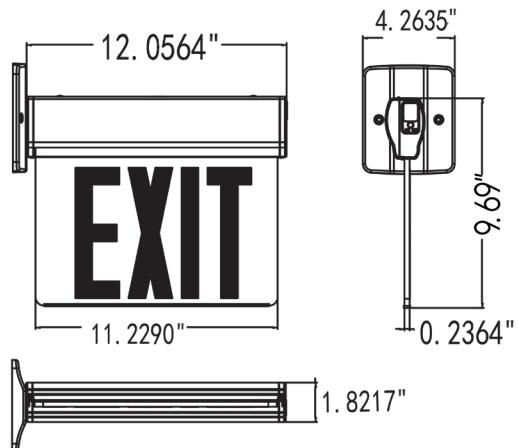

## ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
PLEDG2	1.3	1.3	0.17	0.17