

SPECIFICATIONS

EXITS

HOUSING

- Injection-molded high-impact resistant thermoplastic
- Available in white or black housings
- EZ snap out chevron directional indicators
- Unit comes standard single face with an extra face plate for double face applications

ELECTRICAL

- Dual 120/277V
- Optional 120/230V available
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 40°C (32°F - 104°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs
- 0.5W Led lamps (42 Lumens/head)
- 2W High Output lamps available (110 Lumens/head)
- All-inclusive lamp, reflector, and lens assembly
- Adjustable heads

BATTERY

- 3.6V Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board and lamp heads for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Remote capacity up to 1W

MOUNTING

- Mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified

WARRANTY

- 5 Year




**XCS
Low Profile
Thermoplastic Combo**

ORDERING INFORMATION

MODEL#	Face#	Letter	Housing
XCS	2 (Universal)	R (Red)	W (White)
		G (Green)	B (Black)
		RG (Selectable)	

OPTIONS (Factory Installed)

- RC - Remote Capable (cannot be used with HO)
- HO - High Output Lamps (cannot be used with RC)
- SD - Self Diagnostics
- SV - 120/230V 50/60 Hz

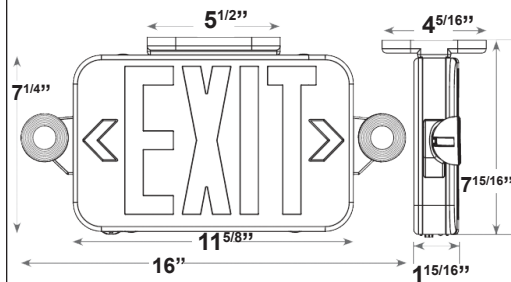

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)			Input Amps (A)		
	120V	230V	277V	120V	230V	277V
XCS2R	1.4	1.2	1.7	0.08	0.09	0.09
XCS2R-RC XCS2R-HL	1.6	1.6	1.6	0.12	0.11	0.11
XCS2G	1.1	1.2	1.3	0.08	0.09	0.09
XCS2G-RC XCS2G-HL	1.6	1.6	1.6	0.12	0.11	0.11
XCS2R-SD	2.5	-	2.5	0.05	-	0.05
XCS2R-RC-SD XCS2R-RC-HL	3.0	-	3.0	0.05	-	0.05
XCS2G-RC-SD XCS2G-RC-HL	2.7	-	2.7	0.05	-	0.05

SPACING GUIDELINES

Model #	Mounting Height (ft)	3' Wide Egress Path		Lumens per Head	Head Qty
		Single Unit (ft)	Unit to Unit (ft)		
XCS	7.5' Wall Mount	10'	14'	42	2
	10' Wall Mount	8'	12'		
XCS-HO	7.5' Wall Mount	35'	38'	110	2
	10' Wall Mount	8'	38'		