

**SPECIFICATIONS**

**EXITS**

**HOUSING**

- Injection-molded high-impact resistant thermoplastic
- Available in white or black housings
- EZ snap out chevron directional indicators
- Unit comes standard single face with an extra face plate for double face applications

**ELECTRICAL**

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

**ILLUMINATION**

- Ultra bright, energy efficient red or green LEDs
- 1.5W LED lamps standard (77 Lumens/head)
- All-uncladive lamp, reflector, and lens assembly
- Adjustable heads

**BATTERY**

- 3.6V Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board and lamp heads for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Remote Capacity of 2.5W available

**MOUNTING**

- Mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

**CODE COMPLIANCE**

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- Assembled in America (Optional)

**WARRANTY**

- 5 Year

**ORDERING INFORMATION**


CATALOG#	Description
XCSQ2RW	Universal Face, Red on White
XCSQ2RB	Universal Face, Red on Black
XCSQ2GW	Universal Face, Green on White
XCSQ2GB	Universal Face, Green on Black

**Options (Factory Installed)**

RC	- Remote Capable (2.5W)
SD	- Self Diagnostics
USA	- Assembled in America



**XCSQ  
Reduced Profile  
Thermoplastic Combo**

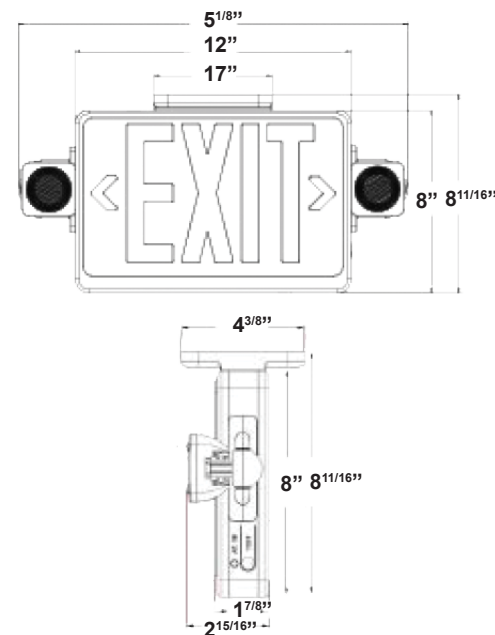

## ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
XCSQ2 XCSQ2-RC	1.2	12	0.12	0.011
XCSQ2R-SD	2.7	2.7	0.32	0.32
XCSQ2G-SD	2.4	2.4	0.29	0.29
XCSQ-RC-SDT	3.0	3.0	0.40	0.40

## SPACING GUIDELINES

Model #	Mounting Height (ft)	3' Wide Egress Path		Lumens per Head	Head Qty
		Single Unit (ft)	Unit to Unit (ft)		
XCSQ	7.5'	26'	30'	77	2
	10'	28'	29'		
	12'	22'	24'		
	15'	20'	23'		