

SPECIFICATIONS

EXITS

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant
- High impact thermoplastic housing
- Available in white or black housings
- Remote Capable

ELECTRICAL

- Dual 120/277V
- Optional dual 120V/230V available
- Unique bi-color LED indicator light for battery condition
- Standard Operating Temperature: 0°C - 40°C (32°F - 104°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs

BATTERY

- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery
- 3.0W of remote capacity standard
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

MOUNTING

- EZ snap thermoplastic Mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified

WARRANTY

- 5 Year



XES-RC Remote Capable Compact Thermoplastic Exit Sign


ORDERING INFORMATION

MODEL#	Face#	Letter	Housing	Battery	Remote Capability	Self Diagnostics
XES	2 (Universal)	R (Red) G (Green) RG (Selectable)	W (White) B (Black)	EM (NiCad)	RC (Remote Capable)	SD* (Self Diagnostics)

*Not available with RG models

Options (Factory Installed)

SV	- 120/230 Volt 50/60Hz (not available with RG models)
----	---

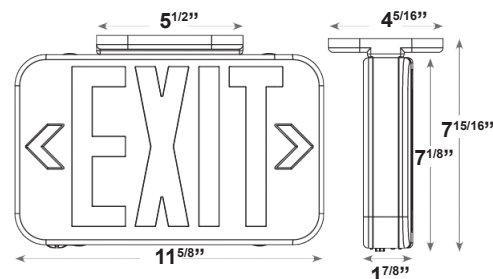

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)			Input Amps (A)		
	120V	230V	277V	120V	230V	277V
XES2R	1.2	N/A	1.2	0.12	N/A	0.12
XES2RG	1.2	1.21	1.2	0.12	0.12	0.12
XES2R-SD	3.0	3.0	3.0	0.05	0.05	0.05
XES2G-SD	2.7	2.7	2.7	0.05	0.05	0.05