

SPECIFICATIONS

EXITS

HOUSING

- Injection-molded high-impact resistant thermoplastic
- Available in white or black housings
- EZ snap out chevron directional indicators
- Unit comes standard single face with an extra face plate for double face applications

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs

BATTERY

- 3.6V Maintenance-free, rechargeable NiCad battery
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- 5.5W Remote capacity standard

MOUNTING

- Mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified

WARRANTY

- 5 Year




XTS
Remote Capable
Thermoplastic Exit

ORDERING INFORMATION

CATALOG#	Description
XTS2RW	Universal Face, Red on White
XTS2RB	Universal Face, Red on Black
XTS2GW	Universal Face, Green on White
XTS2GB	Universal Face, Green on Black

Options (Factory Installed)

SD	- Self Diagnostics
----	--------------------

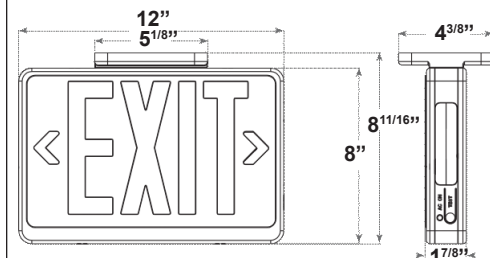

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
XTS-Red/Green	1.2	12	0.12	0.11
XTS-Red-SD	3.0	3.0	0.36	0.36
XTS-Green-SD	3.0	3.0	0.34	0.34