


03.15.02

INSTALLATION INSTRUCTIONS AND OWNER'S MANUAL

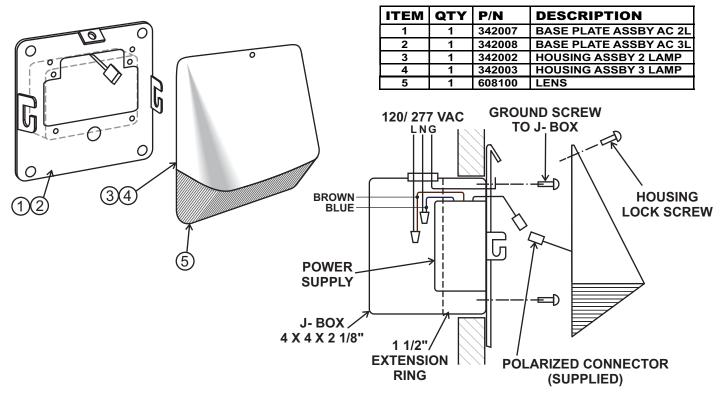

If product is supplied assembled, to separate housing and base remove #6-32 lock screw at top of housing and move housing up and out to release pins.

- 1. Install standard 4 x 4" deep j-box with 1 ½" extension ring.
- 2. Connect the AC input wires from fixture to 120/277 VAC supply with standard wire nuts:

BROWN: LINE (120/ 277 VAC)

BLUE: NEUTRAL GREEN: GROUND

Route ground wire around one of the base mount screws.

- 3. Mount base plate assembly to j-box, flush to wall panel.
- 4. Connect LED lamp plugs (2 or 3), insert side pins in slots on base and tighten housing lock screw.
- 5. Apply AC power and check lamp operation.

IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- 1. Disconnect AC power before servicing.
- 2. Refer to wiring diagram for proper connections.
- 3. All servicing should be performed by qualified personnel.
- 4. Consult your local building code for approved wiring and installation.
- 5. Do not use outdoors.
- 6. Do not use this equipment for other than intended use.
- 7. Do not let power cords touch hot surfaces.
- Mount and secure the fixture at a location and height to avoid ready access and tampering by unauthorized persons.
- The use of accessory equipment is not recommended by the manufacturer and may cause an unsafe condition.

SAVE THESE INSTRUCTIONS